













## 275/K12FB-900F 275/M50FB-1200F

Fixed bollards with reinforced basement

#### **Maximum protection for pedestrian zones**

The **FB Series fixed bollards** are ideal for **vehicle-restricted areas** and **perimeter protection** of buildings, providing certified security. The robust base and internal reinforcement ensure maximum resistance to **impacts from 7.5-ton trucks traveling at 80 km/h (level K12/M50)**.

- Available in painted steel, stainless steel, with replaceable sleeve
- Optional **LED strip** for improved nighttime visibility
- Reinforced basement to embed in concrete
- Triple certification to ASTM, IWA 14-1, PAS68 standards.

Smart! Now available with welded top cover,

for a minimal and elegant design.



#### **Standard configuration**

The standard configuration of our systems is designed to ensure efficiency, safety and ease of management. The configuration includes:

 Anthracite grey painted steel bollard, a device for controlling vehicle access with reinforced basement.



Pilomat S.r.I. Via Zanica 17/P, Grassobbio (BG) Italia pilomat@pilomat.com www.pilomat.com












# 275/K12FB-900F 275/M50FB-1200F

Fixed bollards with reinforced basement

|   | 275/K12FB-900F  | 275/M50FB-1200F |
|---|---|-----------------|
| Cylinder material                       | S355JR normal steel - X5CrNi 18-10 (AISI 304) - X5CrNiMo 17-12-2 (AISI 316) stainless steel |                 |
| Cylinder diameter                       | 271mm   |                 |
| Cylinder height                         | 900mm   | 1200mm          |
| Cylinder thickness                      | 23mm  |                 |
| Cylinder normal steel finish            | Anti-corrosion treatment - grey anthracite standard painting                                |                 |
| Cylinder stainless steel finish         | Grey anthracite standard painting or brushing   |                 |
| Reflecting adhesive strip               | Standard - height 55mm  |                 |
| Connection line for LED lighting strips | Standard 10m (max 80m)  |                 |
| Protection class                        | IP 67   |                 |
| Impact resistance                       | 700.000 J   |                 |
| Breakout resistance                     | 2.000.000 J   |                 |
| Certified to                            | PAS68, IWA 14-1, ASTM M50 (K12)   |                 |







Breakout resistance
2,000,000 J



Pilomat S.r.I. Via Zanica 17/P, Grassobbio (BG) Italia pilomat@pilomat.com www.pilomat.com















## 275/K12FB-900F 275/M50FB-1200F

Fixed bollards with reinforced basement

Pilomat offers safety accessories for every installed system: reflecting strip, LED lighting strip. Each device is designed to ensure maximum efficiency, clear signaling and secure control.

### Available finishes









RAL painting

Brushing

Replaceable stainless steel sleeve

Knurling

Stone mantle Anti-corrosion marine treatment

#### Safety and visibility





Reflecting strip LED lighting strip

### Special design








Custom cover plate

RAL painted cover

Welded cover plate

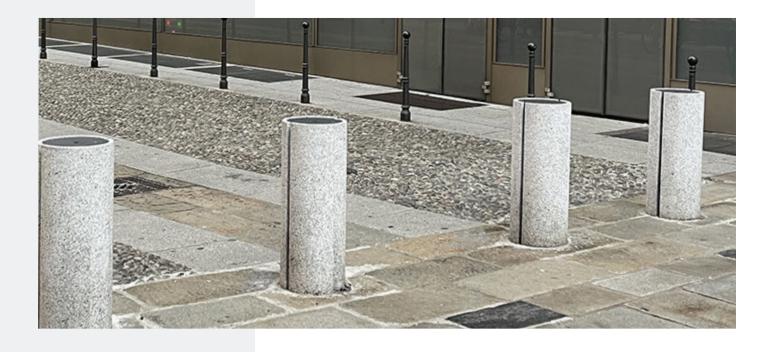



Pilomat S.r.I. Via Zanica 17/P, Grassobbio (BG) Italia pilomat@pilomat.com www.pilomat.com